

BV-Categories of Spacetime Interventions: Extended Abstract

arXiv:2502.19022

James Hefford

Université Paris-Saclay, CNRS, ENS Paris-Saclay, Inria, CentraleSupélec, Laboratoire Méthodes Formelles

james.hefford@inria.fr

Matt Wilson

matthew.wilson@centralesupelec.fr

We use the Chu construction to functorially build BV-categories from duoidal categories, demonstrating that candidate models of BV-logic can be cofreely constructed from a fragment of a model of Guglielmi’s sequencing operator. By using this construction to show that the strong Hyland envelope is a BV-category, we find a way to build a canonical model of spatio-temporal relationships between agents in spacetime from any symmetric monoidal category. The concrete physical interpretation of spacetime events in this model as intervention-context pairs resolves deficiencies in previous attempts to give a general categorical semantics to quantum supermaps.

1 Introduction

Monoidal category theory provides a formalisation of circuit theories, that is, theories of processes with timelike and spacelike composition rules [8]. However, whilst monoidal structure captures a minimal notion of spacetime compatibility of a theory, it is not rich enough to provide a full account of higher-order quantum computation [21] or equivalently of the causal structure and correlations between spacetime events as conceptualised in the modern foundations of physics [6, 15, 17].

In this domain, spatio-temporal correlations are studied by modelling events in terms of the interventions that can be made by agents (see the left of figure 1). Such agents possess the ability to perform experiments by choosing the settings and viewing the outcomes of devices in their local laboratories [15]. This formulation of events in terms of the local interventions of agents motivates a dual picture of spacetime as a *process-with-holes*, referred to variously as the supermap [4, 3, 5], process matrix [15], or process tensor perspective [17]. These spacetime models are innately higher-order: a process-with-holes is interpreted as a context to be probed by the lower-order interventions of the local agents, thereby acting as a map on the processes of some monoidal category (see the right of figure 1).

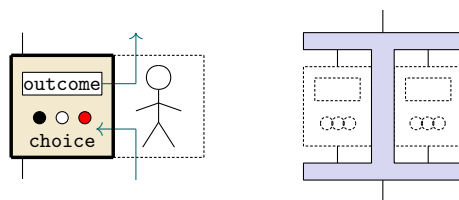


Figure 1: Left: An intervention, Right: A context with two holes.

With the understanding that a fully-fledged model of spatio-temporal correlations requires us to move from processes to spacetime events, we expect that we should move away from mere monoidal categories to a more capable logical system. The deep inference system BV is one such logic originating in the study

of extensions of multiplicative linear logic (MLL) to incorporate non-commutativity [19, 18, 11, 12]. BV-logic is defined in terms of the *calculus of structures* and adds a non-commutative sequencing operator \otimes to the multiplicative conjunction \otimes and disjunction \wp of MLL [11]. These structures permit the graphical depiction given in figure 2.

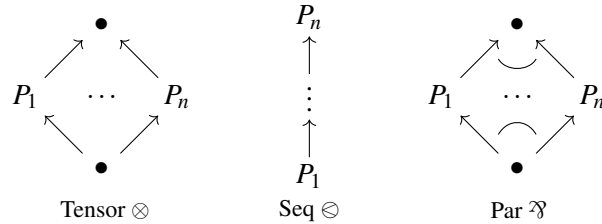


Figure 2: Graphs for the calculus of structures [11].

The similarity between these structures and spacetime diagrams is particularly notable. Indeed, the analogy between the operators \otimes , \otimes and \wp and spatio-temporal correlations was appreciated in the seminal [11]. Upon interpreting the P_i as the agents, we see that \otimes forbids communication, \wp allows arbitrary communication and \otimes permits just one directional communication. Indeed, Guglielmi suggests a broad interpretation of \otimes as temporal composition with $P_1 \otimes P_2$ thought of as “ P_1 before P_2 ”.

2 Main Results

2.1 Technical Contributions

The main technical contribution of the linked preprint is to categorify a result of [1] to prove that the Chu construction [7] is a right 2-adjoint to the forgetful functor U from BV-categories to \otimes -closed, \otimes -symmetric normal duoidal categories, lifting the well-known 2-adjunction between closed symmetric monoidal categories and $*$ -autonomous ones [16].

$$\text{CSNDuo} \begin{array}{c} \xrightarrow{\text{Chu}} \\ \dashv \\ \xleftarrow{U} \end{array} \text{BV}$$

This allows us to construct cofree BV-categories over the fragment given by multiplicative conjunction \otimes , sequencing \otimes and a weak dualising operator $(-)^* = [-, \perp]$. While it is already very well-known that $\text{Chu}(\mathcal{C}, \perp)$ is a model of linear logic, the interesting part here is that the tensor product \otimes can be lifted to give a sequencing operator on $\text{Chu}(\mathcal{C}, \perp)$ with the required self-duality and distributive structures with respect to the tensor \otimes and par \wp . Along the way, we reframe the definition of BV-categories to show that they are pseudomonoids in a 2-category of $*$ -autonomous categories placing them on a firmer algebraic footing. This allows us to define the 2-category BV of BV-categories, BV-functors and BV-transformations and handle all the coherence data in a concise manner.

With this tool at hand, we build upon the work of [13] by studying a modified version of the Hyland envelope [14, 20] which we dub the *strong* Hyland envelope. This allows us to construct BV-categories of higher-order processes over arbitrary symmetric monoidal categories, completing a series of canonical free and cofree constructions starting from any symmetric monoidal category \mathcal{C} to produce a BV-category $\text{StEnv}(\mathcal{C})$.


$$\mathcal{C} \xrightarrow{D} \mathcal{C} \times \mathcal{C}^{\text{op}} \xrightarrow{\mathcal{P}} \text{Prof}(\mathcal{C}) \xrightarrow{N} \text{StProf}(\mathcal{C}) \xrightarrow{\text{Chu}} \text{StEnv}(\mathcal{C})$$

Here, D is the doubling (splicing) construction of [9]; \mathcal{P} is the free cocompletion; N is the normalisation of duoidal categories [10, 9]; and Chu is the Chu construction [7, 2]. Besides \otimes which is lifted all the way along this series of adjunctions, all the other logical connectives (\otimes , \wp and $(-)^*$) alongside their necessary interaction, are (co)freely added.

2.2 Physics Contributions

We justify our claim that $\text{StEnv}(\mathcal{L})$ is not just a canonical BV-category, but a physically relevant one that develops and brings together aspects of those already in the literature.

The objects of $\text{StEnv}(\mathcal{L})$ consist of intervention-context pairs. This unites the two dual views of spacetime events: an event is no longer just the local actions of an agent, nor the hole in a process, but a unification of the two. The causal relationships between these events are captured by the tensors \otimes , \otimes and \wp which act on the interventions in the following fashion.

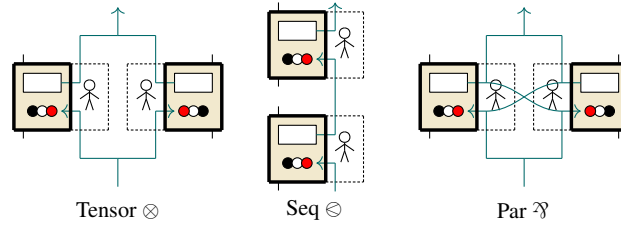

These tensors come equipped with distributors which act as,

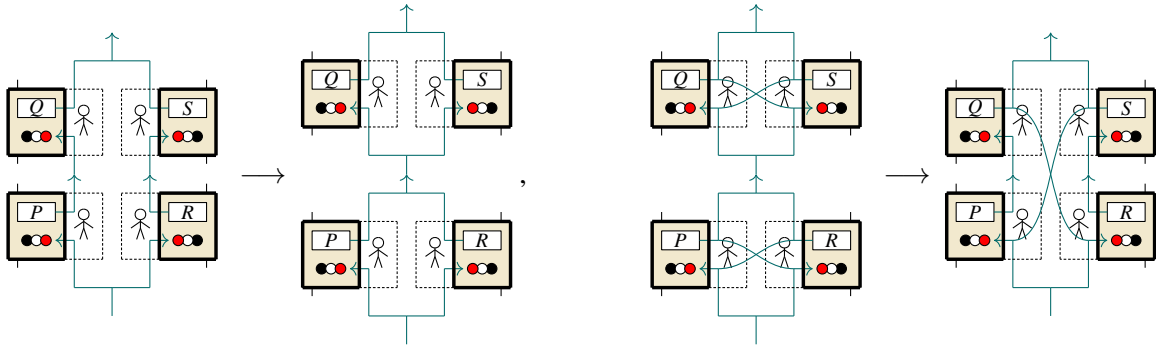


Figure 3: The distributors $(P \otimes Q) \otimes (R \otimes S) \rightarrow (P \otimes R) \otimes (Q \otimes S)$ and $(P \wp R) \otimes (Q \wp S) \rightarrow (P \otimes Q) \wp (R \otimes S)$.

This allows us to build a model of spacetime events supporting the previous tensor products from *any* underlying theory of first-order processes. This includes finite dimensional quantum theory, but also pure unitary maps, infinite dimensional systems, and arbitrary operational probabilistic theories such as Boxworld.

Acknowledgements

James Hefford is funded by the French National Research Agency (ANR) within the framework of “Plan France 2030”, under the research projects EPIQ ANR-22-PETQ-0007 and HQI-R&D ANR-22-PNCQ-0002.

References

- [1] Robert Atkey & Wen Kokke (2024): *A Semantic Proof of Generalised Cut Elimination for Deep Inference*. *Electronic Notes in Theoretical Informatics and Computer Science* Volume 4 - Proceedings of MFPS XL:4, doi:10.46298/entics.14870.
- [2] Michael Barr (1979): **-Autonomous categories*. *Lecture Notes in Mathematics* 752.
- [3] Giulio Chiribella, Giacomo Mauro D’Ariano & Paolo Perinotti (2008): *Quantum Circuit Architecture*. *Physical Review Letters* 101(6), p. 060401, doi:10.1103/physrevlett.101.060401.
- [4] Giulio Chiribella, Giacomo Mauro D’Ariano & Paolo Perinotti (2008): *Transforming quantum operations: Quantum supermaps*. *EPL (Europhysics Letters)* 83(3), p. 30004, doi:10.1209/0295-5075/83/30004.
- [5] Giulio Chiribella, Giacomo Mauro D’Ariano & Paolo Perinotti (2009): *Theoretical framework for quantum networks*. *Phys. Rev. A* 80, p. 022339, doi:10.1103/PhysRevA.80.022339.
- [6] Giulio Chiribella, Giacomo Mauro D’Ariano, Paolo Perinotti & Benoît Valiron (2013): *Quantum computations without definite causal structure*. *Phys. Rev. A* 88, p. 022318, doi:10.1103/PhysRevA.88.022318.
- [7] Po-Hsiang Chu: *Constructing *-Autonomous Categories*. Appendix to [2].
- [8] Bob Coecke & Aleks Kissinger (2017): *Picturing Quantum Processes: A First Course in Quantum Theory and Diagrammatic Reasoning*. Cambridge University Press, doi:10.1017/9781316219317.
- [9] Matt Earnshaw, James Hefford & Mario Román (2023): *The Produoidal Algebra of Process Decomposition*, doi:10.48550/ARXIV.2301.11867.
- [10] Richard Garner & Ignacio López Franco (2016): *Commutativity*. *Journal of Pure and Applied Algebra* 220(5), pp. 1707–1751, doi:10.1016/j.jpaa.2015.09.003.
- [11] Alessio Guglielmi (2007): *A system of interaction and structure*. *ACM Transactions on Computational Logic* 8(1), doi:10.1145/1182613.1182614.
- [12] Alessio Guglielmi & Lutz Straßburger (2001): *Non-commutativity and MELL in the Calculus of Structures*. In Laurent Fribourg, editor: *Computer Science Logic*, pp. 54–68, doi:10.1007/3-540-44802-0_5.
- [13] James Hefford & Matt Wilson (2024): *A Profunctorial Semantics for Quantum Supermaps*. In: *Proceedings of the 39th Annual ACM/IEEE Symposium on Logic in Computer Science, LICS ’24*, Association for Computing Machinery, New York, NY, USA, doi:10.1145/3661814.3662123.
- [14] J.M.E. Hyland (2002): *Proof theory in the abstract*. *Annals of Pure and Applied Logic* 114(1), pp. 43–78, doi:10.1016/S0168-0072(01)00075-6.
- [15] Ognjan Oreshkov, Fabio Costa & Časlav Brukner (2012): *Quantum correlations with no causal order*. *Nature Communications* 3(1092), doi:10.1038/ncomms2076.
- [16] Duško Pavlović (1997): *Chu I: cofree equivalences, dualities and *-autonomous categories*. *Mathematical Structures in Computer Science* 7(1), pp. 49–73, doi:10.1017/S0960129596002046.
- [17] Felix A. Pollock, César Rodríguez-Rosario, Thomas Frauenheim, Mauro Paternostro & Kavan Modi (2018): *Non-Markovian quantum processes: Complete framework and efficient characterization*. *Phys. Rev. A* 97, p. 012127, doi:10.1103/PhysRevA.97.012127. Available at <https://link.aps.org/doi/10.1103/PhysRevA.97.012127>.
- [18] Christian Retoré (1993): *Réseaux et séquents ordonnés*. Ph.D. thesis, Université Paris-Diderot - Paris VII.
- [19] Christian Retoré (1997): *Pomset logic: A non-commutative extension of classical linear logic*. In: *Typed Lambda Calculi and Applications*, pp. 300–318.
- [20] Michael Shulman (2021): **-Autonomous Envelopes and Conservativity*. *Electronic Proceedings in Theoretical Computer Science* 353, pp. 175–194, doi:10.4204/eptcs.353.9.
- [21] Philip Taranto, Simon Milz, Mio Murao, Marco Túlio Quintino & Kavan Modi (2025): *Higher-Order Quantum Operations*. arXiv:2503.09693.